


MPPT-DC series
MPPT Solar charge controller
with LED driver built-in
(Constant Current, Boost)
12/24V, 8/10/15/20A

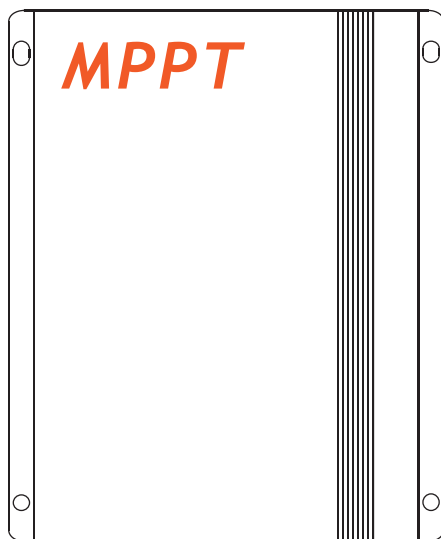

User Manual

User Manual_MPPT-DC series_QE
CE, RoHS, ISO9001:2015
Subject to change without notice!

Solar charge controller MPPT-DC series User Manual

Dear Clients,

Thanks for selecting the **MPPT-DC** series solar charge controller. Please take the time to read this user manual, this will help you to take advantage of controller's new features. This manual gives important recommendations for installing, programming, using and so on. Read it carefully in your own interest please.

1.Description of Function

MPPT-DC series intelligent MPPT solar charge controller is programmable and especially for boost mode LED solar street light system. It includes constant current driver function. The charging efficiency is about 20% higher than the traditional PWM controller, which can drop the cost of the whole system.

- Innovative Max Power Point Tracking(MPPT) technology, tracking efficiency >99.9%
- Full digital technology, high charge conversion efficiency up to 97.5%, discharge conversion efficiency up to 96.5%
- Can output constant current (output current can be set)
- 5 stages time and dimming can be adjusted
- Can read parameters and running status
- If battery voltage is low, it can be set to dimming
- Dimming start voltage and percentage can be set
- Day/Night threshold can adjust automatically
- AGM, Liquid, GEL and Lithium battery for selection
- 0°C Charging Protection(Lithium)
- When BMS power off because of LVD, it can activate the system automatically
- External temperature sensor, automatic temperature compensation(AGM, Liquid and GEL)
- Four stages charge way: MPPT, boost, equalization, float
- Remote Unit to configure, with LCD display
- Ip67, Strong and durable aluminum case Full automatic electronic protect function

2.Safety Instruction and Waiver of Liability

2.1 Safety

①The solar charge controller may only be used in PV systems in accordance with this user manual and the specs of other module manufacturers. No energy source other than solar gen. may be connected to the solar charge controller.

②Batteries store a large amount of energy, never short circuit a bat. under all circumstances. We strongly recommend connecting a fuse directly to the battery to protect any short circuit at the bat. wiring.

③Batteries can produce flammable gases. Avoid making sparks, fire or any naked flame. Make sure that the bat. room is ventilated.

④Avoid touching or short circuiting wires or terminals. Be aware that the voltages on special terminals or wires can be as much as twice the battery voltage. Use isolated tools, stand on dry ground, and keep your hands dry.


⑤Keep children away from batteries and the charge controller.

2.2 Liability Exclusion


The manufacturer shall not be liable for damages, especially on the battery, caused by use other than as intended or as mentioned in this manual or if the recommendations of the battery manufacturer are neglected. The manufacturer shall not be liable if there has been service or repair carried out by any unauthorized person, unusual use, wrong installation, or bad system design.

3.Dimensions(Unit:mm)


3.1 Controller dimension




MPPT0850-DCLi




MPPT0875/1050/1550-DCLi



MPPT1075-DCLi






MPPT1575-DCLi






MPPT2075-DCLi

Solar charge controller MPPT-DC series User Manual

3.2 Sensor dimension(Unit:mm)Sensor lines length: 400mm Infrared sensor head




Microwave induction head



※ MRS05 is currently only compatible with MPPT-DCLiGV series products.

4. Installation

The following diagrams provide an overview of the connections and the proper order



Hot plugging is prohibited!
Please connect the inductive sensor to R/V series controller first!

1. Firstly, connect the sensing probe with the corresponding interface on the controller.
 2. As the chart, connect the load with the corresponding brown(positive) and blue(negative) cables firstly, then seal them with tape.
 3. Connect battery with the corresponding red(positive) and black(negative) cables. Load will be on after 5s.
 4. Connect panel with the corresponding red(positive) and black/green(negative) cables, the load will be off after 5s, and the controller begins charging.
 5. Refer to 9.1 LED indications and Faults&Alarms to confirm the LED display status.
- Make sure the wire length between battery and controller is as short as possible.
 - Recommended minimum wire size:
8/10A: 2.5 mm²; 15/20A: 4 mm².

4.2 Transportation mode(Lithium)

The controller is generally integrated with the lithium battery in the lithium battery pack for transport, if the controller works normal during transport, it will waste of energy and increase the transport risk. If the controller is set to transport mode, the load has no output, then the power consumption is reduced by about 60%, to avoid lithium battery voltage too low.

4.2.1 Open circuit protection

If the controller is only connected with the battery, but not connected with solar and load, the controller will enter transportation mode after 5 minutes.

4.2.2 Press the "Test" key in transport mode

Press the "Back" and "Backlight" key at the same time more than 3s, the remote controller will work in transport mode.

Press the "Test" key in the transport mode, the remote controller displays "Transport OK" and will beep a long sound, the controller enters into transport mode.


If the controller enters transport mode, the red LED will slow flash(0.2s on/5s off), the green and yellow led will be off and the remote control displays "Open CP".

4.2.3 Exit the transportation mode

When the load is properly connected, press the test key or connect the solar more than 1s during daytime, the transport mode will terminate and the controller will work normally.

5. Remote controller, Default setting

Setting can be changed using the "SU10G" infrared remote programmer. For detailed instructions and settings, please see the SU10G programmer remote manual.

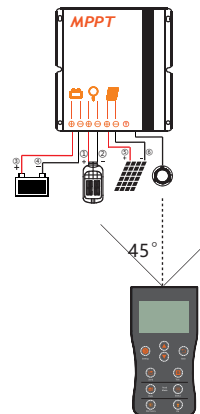

Solar charge controller MPPT-DC series User Manual

5.1 Test function

Press the "Test" key of SU10G, the controller will turn on load for 10s. During daytime, the testing function can help users to verify correct installation or for system trouble shooting. 10s later the load will automatically turn off.

5.2 Read the running status

Press the "Status" key of the SU10G to read the running status of the controller.

Num	Name	Name describe	Unit
	Status:	Charge	
1	Batt V	Battery voltage	V
2	Load I	Load current	A
3	Load V	Load voltage	V
4	PV V	PV voltage	V
5	PV I	PV current	A
6	Energy	Total generating capacity	AH
7	OD Times	Over discharge times	Times
8	FC Times	Fully charge times	Times
9	Day1-HV	A day ago highest voltage	V
10	Day1-LV	A day ago lowest voltage	V
11	Day2-HV	Two days ago highest voltage	V
12	Day2-LV	Two days ago lowest voltage	V
13	Day3-HV	Three days ago highest voltage	V
14	Day3-LV	Three days ago lowest voltage	V

5.3 Read the parameters

Press the "Parameter" key of the SU10G to read the setting parameters of the controller.

Num	Name	MPPT-DC
01	Time1	4H
02	Dim1	100%
03	Dim NP1	100%
04	Time2	0H
05	Dim2	100%
06	Dim NP2	0%
07	Time3	0H
08	Dim3	100%
09	Dim NP3	0%
10	Time4	0H
11	Dim4	100%
12	Dim NP4	0%
13	Time5	0H
14	Dim5	100%
15	Dim NP5	0%
16	D/N Thr	5V
17	D/N Dly	0min
18	Load I	0.30A
19	Dim Auto	Yes
20	Dim V	12.5V
21	Dim %	10%
22	Battery	Li
23	Series	4
24	CVT	14.4V
25	CVR	13.6V

26	LVD	10.4V
27	LVR	12.0V
28	0°C Chg	Yes
29	DelayOff	10s
30	Password	0000

✎ Password only applies to SU10G.

6.Starting up the controller

6.1 Self Test

As soon as the controller is connected to battery, it starts self test. Then the display changes to normal operation.

6.2 Battery Type

The controller applies to Lithium, AGM, Liquid and Gel battery, the factory default setting is suitable for Lithium battery.

When the controller is set to Lithium battery, the charging target voltage and charging recovery voltage can be set according to customer requirements.

The controller adjusts itself automatically to 12V or 24V system voltage when it is set to Gel, Liquid or AGM battery. If the battery voltage on start-up is 0V-15.5V then the controller infers a 12V system.

If the battery voltage is 20V-30V the controller infers a 24V system. If the battery voltage is not within the normal operating range (ca.0 to 15.5V or ca.20 to 30V) at start-up, please refer to **9.2 Faults & Alarms**.

6.3 0°C Charging Protection

"0°C Chg" can be set to "Yes", "Slow" or "No". When the controller detects that the ambient temperature is higher than 0°C, the charging function is normal. When the ambient temperature is low than 0°C, if the "0°C Chg" is set to "Yes", the charging function is normal, else if the "0°C Chg" is set to "slow", the max charging current is 20% of the rated current, else if the "0°C Chg" is set to "No", the controller does not charge the battery.

The user can select the appropriate charging method.

7. Streetlight Function

For controller with infrared sensing function (R series), if work mode is set to "Five-stage Night Mode" or "TOT mode", "DelayOff" and "Dim NP" work in "Time3" and "Time4".

"DelayOff" setting range: 10~150s.

"Dim NP" setting range: 0~100%.

7.1 Dusk to Dawn (D2D, no induction function)




If "Time1" is set to "D2D", the controller works in dusk to dawn mode.

- ✎
- 1.MPPT-DC solar charge controller is set to D2D mode, the corresponding dimming setting is still valid.
 2. If "Time1" is set to D2D mode, "Time4" can not be set to TOT mode.


Solar charge controller MPPT-DC series User Manual

7.2 Five-stage Night Mode(Time3, Time4 can induction)

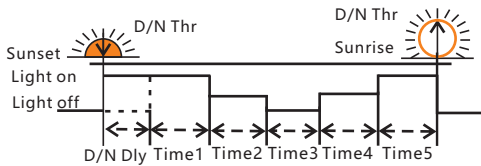

You can set the Time 1-5 and Dim 1-5 with SU10G.

7.3 T0T mode(Time3, T0T can induction)

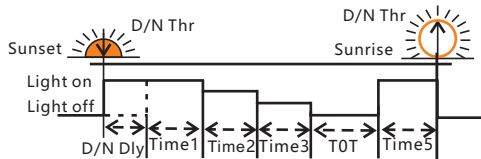

If "Time4" is set to "T0T", this mode is T0T mode.

* If "Time4" is set to T0T mode, "Time1" can not set to D2D mode.

Parameter setting example:

Time1: 1.0H/100% Time2: 2.0H/80%

Time3: 3.0H/60% Time4: T0T/40%

Time5: 2.0H/100%

DelayOff: 10s

Dim NP: 10%

The controller works as follows:

After the arrival of the evening the first time the load is lit for 1 hour (full power 100%), the second time the load is lit for 2 hours (power 80%), the third time load light for 3 hours (when people is near the lamp then the load is 60% light, when people is away from the lamp the load is 60% * 10% light), and then the controller according to the actual night time automatically calculate the length of the fourth paragraph (when people is near the lamp then the load is 40% light, when people is away from the lamp the load is 40% * 10% light), the fifth time load light 2 hours (full power 100%).

8.2Low Voltage Reconnect (LVR)

If the controller goes into low voltage disconnect, it will restore only when the battery being recharged to the recovery voltage.

	Gel, Liquid and AGM	Lithium
MPPT0850/0875/1050/1550-DCLi	11.4~12.8V	9.6V~16.0
MPPT1075/1575/2075-DCLi	11.4~12.8/22.8~25.6V	9.6V~31.0V

8.3 Day/Night Threshold, Day/Night Delay


The controller recognizes day and night based on the solar array open circuit voltage. This day/night threshold can be modified according to local light conditions and the solar array used.

Day/Night threshold setting range:

MPPT0850/0875/1050/1550-DCLi	3.0~8.0V
MPPT1075/1575/2075-DCLi	3.0~20.0V

In the evening, when the solar array open circuit voltage reaches the setting day/night threshold, you can adjust the day/night delay time to make the load turn on a little later.

Day/Night delay time setting range: 0~30min.

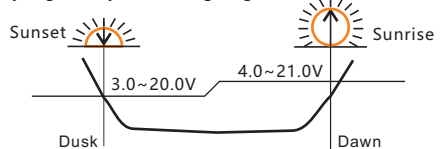

1. Day/Night threshold voltage should be set around 0.22 times of open circuit voltage.
2. Day/Night threshold voltage of load disconnect is 1V higher than the setting data, means the load will disconnect when the solar voltage at 4.0~9.0/4.0~21.0V.
3. The controller has an automatic day/night threshold adjustment function. If the lowest voltage of solar array is higher than the setting day/night threshold, the load has no output in first night, 24 hours later the controller can automatically adjust the day/night threshold to meet the requirements of lighting at night.

8.4 Auto Dimming mode

The "Dim Auto" item of SU10G is set to "Yes", set "Dim V" and "Dim %" at the same time, press the "Send" key to set up the controller. when the battery voltage is lower than the voltage of "Dim V", it starts to dimming automatically. Battery voltage reduces per 0.1/0.2V, load current decreased according to the set of "Dim %", the minimum output current is 10% of the setting current.



If the controller is set to "Dim" or "Auto Dim", the minimum output current can be as low as 100mA.

8.LVD, LVR, Threshold, Dimming


8.1 Low Voltage Disconnect (LVD)

When the battery voltage drops below the LVD voltage, the controller will disconnect the load to prevent deep discharge of the battery. If this occurs, the battery should be well charged before resuming use.

	Gel, Liquid and AGM	Lithium
MPPT0850/0875/1050/1550-DCLi	10.8~11.8V	9.0V~15.0
MPPT1075/1575/2075-DCLi	10.8~11.8/21.6~23.6V	9.0V~30.0V

Solar charge controller MPPT-DC series User Manual

9.LED indications and Faults & Alarms

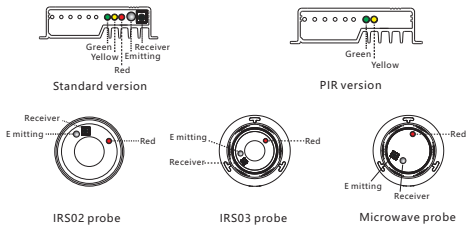

9.1 LED Display Explanation

LED	Status	Function
Green LED	On	Solar panel is correctly connected, but not charged
	Fast flash(0.1/0.1s)	Charging
	Flash(0.5s/0.5s)	Equal or Boost Charging
	Slow flash(0.5/2s)	Float Charging, Lithium constant voltage charge
Yellow LED	Off	Over voltage protection
	On	Battery is normal
	Slow flash(0.5/2s)	Battery voltage is low
	Fast flash(0.1/0.1s)	Low voltage protection
Red LED	Off	Work normal(Standard version)
	On	The output power is 0
	Super slow(0.2/5s)	Open circuit protection
	Flash(0.5s/0.5s)	Over temperature
Red LED response	Fast flash(0.1/0.1s)	Short circuit or Over current protection
	Slow flash(2.5s/2.5s)*1	Work normal(Induction probe)

Detailed fault information can be read by SU10G remote controller.

*1.This data indicates the red indicator status of PIR sensor of infrared induction version.

9.2 Faults & Alarms

Fault	Status	Reason	Remedy
Loads are not powered	Low volt. protection	Battery capacity is low	Load will be reconnected when battery is recharged
	Overcurrent, short circuit protection	Loads are over current or short circuit	Switch off all loads, remove short circuit, load will be reconnected after 1 minute automatically
	Over temp. protection	Controller temp. is too high	Load reconnects after temp. reduces
High voltage at battery terminal	Over voltage protection	High battery voltage >15.5V/31.0V	Check if other sources overcharge the battery. If not,controller is damaged.
		Battery wires or battery fuse damaged, battery has high resistance.	Check battery wires, fuse and battery.
Can't recognize system voltage	All LED fast flashing	Battery voltage is not in right range	Charge or discharge, make battery voltage in the right range
Battery is empty after a short time	Low voltage protection	Battery has low capacity	Change battery
Battery can't be charged	Green LED is on	PV panel fault or reverse connection	Check panels and connection wires

* Lithium: Battery overvoltage > (CVT+0.2V)

Gel, Liquid and AGM: Battery overvoltage > 15.5/31.0V

10.Safety Features

	Solar terminal	Battery terminal	Load terminal
Reverse polarity	Protected *2	Protected	Protected
Short circuit	Protected*1	Protected *2	Switches off immediately
Over current	—	—	Switches off with delay
Reverse Current	Protected	—	—
Over voltage	Max *3	Max*4	—
Under voltage	—	—	Switches off
Over temp.	The controller cuts off the load if the temperature reaches the set value.		

*1.When the PV doesn't charge, the controller will not be damaged if short-circuit just happened in the PV array.

Warning: It is forbidden to short-circuit the PV array during charging .Otherwise, the controller may be damaged.

*2.Battery must be protected by fuse, otherwise battery will be damaged.

*3.Please refer to "12.Technical Data" to get the max voltage of PV panel.

*4.Please refer to "12.Technical Data" to get the max voltage of battery.

Solar charge controller MPPT-DC series User Manual



Warning: The combination of different error conditions may cause damage to the controller. Always remove the error before you continue connecting the controller.


11. Recommended connection of LED lights

11.1 Load

Following connect ways is for the LED lights


(Vf: 2.9V~3.4V; I: 300mA, Power: 1W)

n for number of parallel connection



System Voltage	Output Voltage	Load current	LED chips connection
MPPT0850/1550-DCLi	20~35V	0.15~3.0A	M=7~10 N=1~10
MPPT1050-DCLi	20~45V		M=7~14 N=1~10
MPPT0875-DCLi	20~55V		M=7~18 N=1~10
MPPT1075-DCLi	15~60V	0.15~4.0A	M=5~18 N=1~20
MPPT1575/2075-DCLi	20~55V	0.15~6.0A	M=7~18 N=1~20

11.2 Sensor



Type	Angle(θ)	High(H)	Width(D)
Infrared sensor(IR)	60°	6~8m	6~8m
Microwave sensor(WB)	60°	6~8m	7~12m

Induction Introduction :

Human body infrared sensing sensor: A human body sensing sensor made using the pyroelectric effect. The infrared sensing range varies with temperature and lighting conditions.

Microwave Radar Sensing Sensor: A moving object detector made using the Doppler effect principle, with high radar sensing sensitivity and is not susceptible to environmental, temperature, dust, and other impacts.

1) The microwave induction controller can only be equipped with a microwave induction probe and cannot use red external sensing probe, otherwise the infrared sensing probe may be damaged!!!

2) The sensor which installed in the plastic and glass lampshade will reduce the sensitivity.

3) Sensor range will change with temperature, light conditions and so on, subject to the actual measurement.

4) The distance between any inductive sensors should be greater than 3m.

5) Please ensure that there are no moving signals around the sensor, such as fan, DC motor, sewer pipe, air outlet, etc., the sensor may generate false trigger.

Solar charge controller MPPT-DC series User Manual

12. Technical Data

		Standard product	MPPT0850-DCLi	MPPT0875-DCLi	MPPT1050-DCLi	MPPT1550-DCLi
	Item	Suffix description	G: 2.4G wireless remote control (default infrared remote control without suffix); R: Infrared sensing; V: Microwave induction; GV: 2.4G remote control+microwave induction; GR: 2.4G remote control+infrared sensing; RS485: 485 communication; IoT: Internet of Things communication; TTL: TTL communication			
Battery Parameters	System Voltage		12V			
	Max Charging Current		8A		10A	15A
	Max volt on Bat. Terminal		25V			
	Battery Type		Liquid, Gel, AGM and Lithium (Programmable, default: Lithium)			
	Liquid, Gel and AGM	MPPT Charging Voltage	<14.5V@25°C			
		Boost Voltage	14.5V @25°C			
		Equalization Voltage	14.8V @25°C (Liquid, AGM)			
		Float Voltage	13.7V @25°C			
		Low Volt. Disconnect	10.8~11.8V (Programmable)			
		Reconnect Voltage	11.4~12.8V (Programmable)			
		Overcharge Protect	15.5V			
		Temp. Compensation	-4.17mV/K per cell (Boost, Equalization), -3.33mV/K per cell (Float)			
	Lithium	Charging Volt. target	10.0~17.0V(Programmable, default: 14.4V)			
		Charging Volt. recovery	9.2~16.8V(Programmable, default: 14.0V)			
		Low voltage disconnect	9.0~15.0V(Programmable, default: 10.8V)			
		Low voltage reconnect	9.6~16.0V (Programmable, default: 11.8V)			
		0°C Charging protection	Yes, Slow, No(Programmable)			
Panel Parameters	Max volt on PV terminal *1		35V	60V	45V	35V
	Max input power		100W~120W		120W~150W	180W~225W
	Dusk/Dawn detect volt.		3.0~8.0V (Programmable)			
	Day/Night delay time		0~30min (Programmable)			
	MPPT tracking range		(Battery Voltage +1.0V) ~Voc*0.9 *2			
Load Parameters	Output Power		1~50W	1~60W		1~80W
	Output Voltage		20 ~ 35V	20 ~ 55V	20~45V	20~35V
	Current setting range		0.15~3.0A (Programmable)			
	Min current		100mA (Dimming)			
	Current precision		±2%			
	Dimming		0~100% (Programmable)			
	Voltage of start dimming		11.8~12.5V(Gel,AGM and Liquid); 10.0~17.0V(Lithium)			
	Dimming percentage		1~20% (Programmable)			
System Parameters	Max tracking efficiency		>99.9%			
	Max charge conversion		96.5%			
	Max LED driver efficiency		96%			
	communication mode		Infrared/2.4G/IOT			
	Induction mode		Infrared Human Sensing/Microwave Sensing			
	Self consumption		6~25mA			
	Dimensions		63*85.8*23.1mm	81*85.8*23.1mm		
	Net weight		230g	260g		
	Ambient temperature		-35~+60°C			
	Ambient humidity		0~100%RH			
	Protection degree		IP67			
	Max Altitude		4000m			

*1.This value represents the maximum voltage of the solar panel at the minimum operating ambient temperature.

*2.Voc means the open circuit voltage of the solar panel.

Solar charge controller MPPT-DC series User Manual

	Item	Standard product	MPPT1075-DCLi	MPPT1575-DCLi	MPPT2075-DCLi
		Suffix description	G: 2.4G wireless remote control (default infrared remote control without suffix); R: Infrared sensing; V: Microwave induction; GV: 2.4G remote control+microwave induction; GR: 2.4G remote control+infrared sensing; RS485: 485 communication; IoT: Internet of Things communication; TTL: TTL communication		
Battery Parameters	System Voltage		12V/24V automatical recognition*3		
	Max Charging Current		10A	15A	20A
	Max volt on Bat. Terminal		35V		
	Battery Type		Liquid, Gel, AGM and Lithium (Programmable, default: Lithium)		
	Liquid, Gel and AGM	MPPT Charging Voltage	<14.5/29.0V@25°C		
		Boost Voltage	14.5/29.0V @25°C		
		Equalization Voltage	14.8/29.6V @25°C (Liquid, AGM)		
		Float Voltage	13.7/27.4V @25°C		
		Low Volt. Disconnect	10.8~11.8V/21.6~23.6V (Programmable)		
		Reconnect Voltage	11.4~12.8V/22.8~25.6V (Programmable)		
		Overcharge Protect	15.5/31.0V		
		Temp. Compensation	-4.17mV/K per cell (Boost, Equalization), -3.33mV/K per cell (Float)		
	Lithium	Charging voltage target	10.0~32.0V(Programmable, default: 14.4V)		
		Charging voltage recovery	9.2~31.8V(Programmable, default: 14.0V)		
		Low voltage disconnect	9.0~30.0V(Programmable, default: 10.8V)		
		Low voltage reconnect	9.6~31.0V (Programmable, default: 11.8V)		
		0°C Charging protection	Yes, Slow, No(Programmable)		
Panel Parameters	Max volt on PV terminal		60V*1	55V *1	
	Max input power		130W/260W	200W/400W	260W/520W
	Dusk/Dawn detect volt.		3.0~20.0V (Programmable)		
	Day/Night delay time		0~30min (Programmable)		
	MPPT tracking range		(Battery Voltage +1.0V) ~Voc*0.9 *2		
Load Parameters	Output Power		10~60W/20~120W	10~90W/20~180W	
	Output Voltage		15~60V/35~60V	20~55V/30~55V	
	Current setting range (Programmable)		0.15~4.0A	0.15~6.0A	
	Min current		100mA (Dimming)		
	Current precision		±2%		
	Dimming		0~100% (Programmable)		
	Voltage of start dimming		11.8~12.5V/23.6~25.0V(Gel,AGM and Liquid); 10.0~32.0V(Lithium)		
	Dimming percentage		1~20% (Programmable)		
System Parameters	Max tracking efficiency		>99.9%		
	Max charge conversion		97.5%		
	Max LED driver efficiency		96.5%		
	communication mode		Infrared/2.4G/IOT		
	Induction mode		Infrared Human Sensing/Microwave Sensing		
	Self consumption		6~25mA		
	Dimensions		113*88.5*24.3mm	145*85.8*30mm	145*95.8*42.5mm
	Net weight		370g	550g	700g
	Ambient temperature		-35~+60°C		
	Ambient humidity		0~100%RH		
	Protection degree		IP67		
	Max Altitude		4000m		

*1.This value represents the maximum voltage of the solar panel at the minimum operating ambient temperature.

*2.Voc means the open circuit voltage of the solar panel.

*3.Around oblique line value separately on behalf of 12V and 24V system's value.